


Uses optical lenses that magnify lumen output

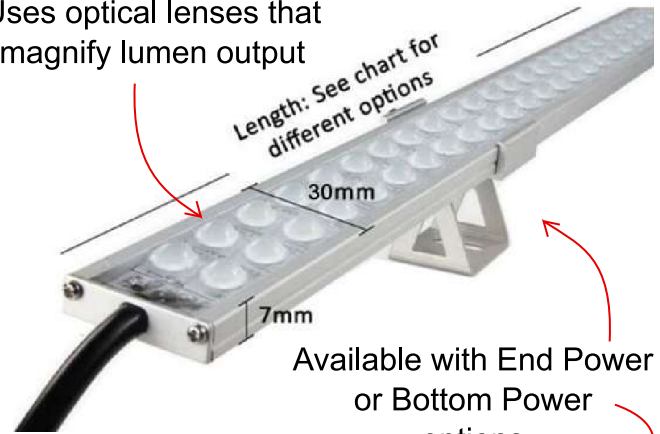


**Specs:**

- IP65 rated for outdoor environment.
- High lumen output.
- Working temperature: -30°C to 60°C.
- 5630 LED chip.
- Optical lens.
- Aluminum track enclosure.

**Installation Options:**

- Inside sign cabinets
- Cove lighting
- Architectural lighting
- Exterior linear lighting


**Available Colors**




**Parameters**

Model	LED Color	Voltage	Power (W)	Lumen (LM/m)	Length (mm)	LED Qty	LED Chip	View Angle
SR-1800-25	See Options	DC24V	25	2500	1800	96	SMD5630	45°, 60°, 90°
SR-1200-18			18	1620	1200	72		
SR-1000-15			15	1350	1000	60		
SR-600-9			9	810	600	36		
SR-300-4.5			4.5	405	300	18		

**Single Row**

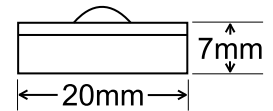


**Double Row**

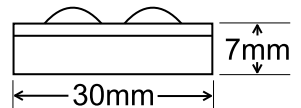


Model	LED Color	Voltage	Power (W)	Lumen (LM/m)	Length (mm)	LED Qty	LED Chip	View Angle
DR-1800-25	See Options	DC24V	42	4260	1800	216	SMD5630	45°, 60°, 90°
DR-1200-18			36	3240	1200	144		
DR-1000-15			30	2700	1000	120		
DR-600-9			18	1620	600	72		
DR-300-4.5			9	810	300	36		


Sample Connections:

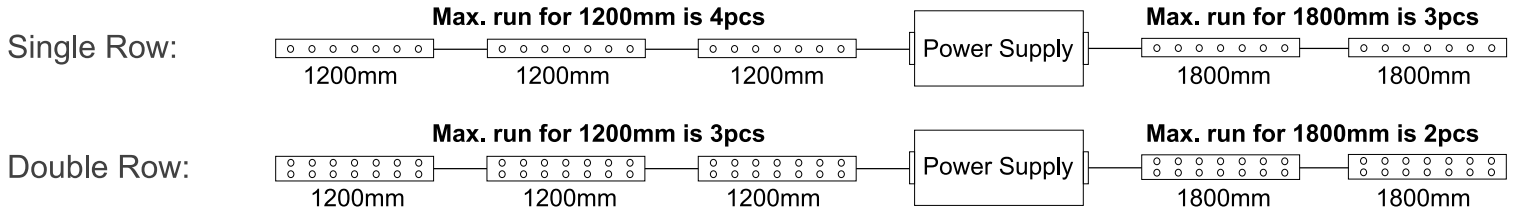


Digital:

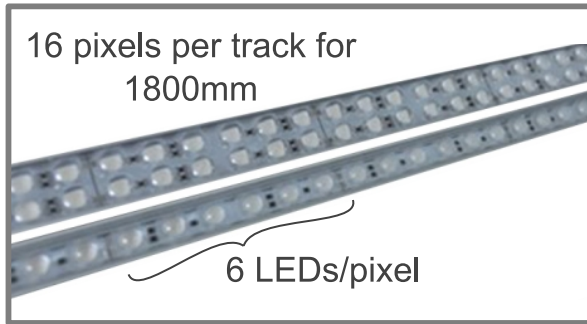

Sample Connections (Digital):

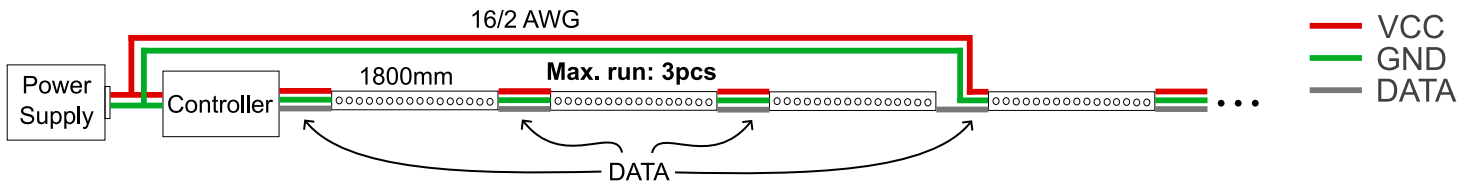

Sign Cabinet Installation Example:

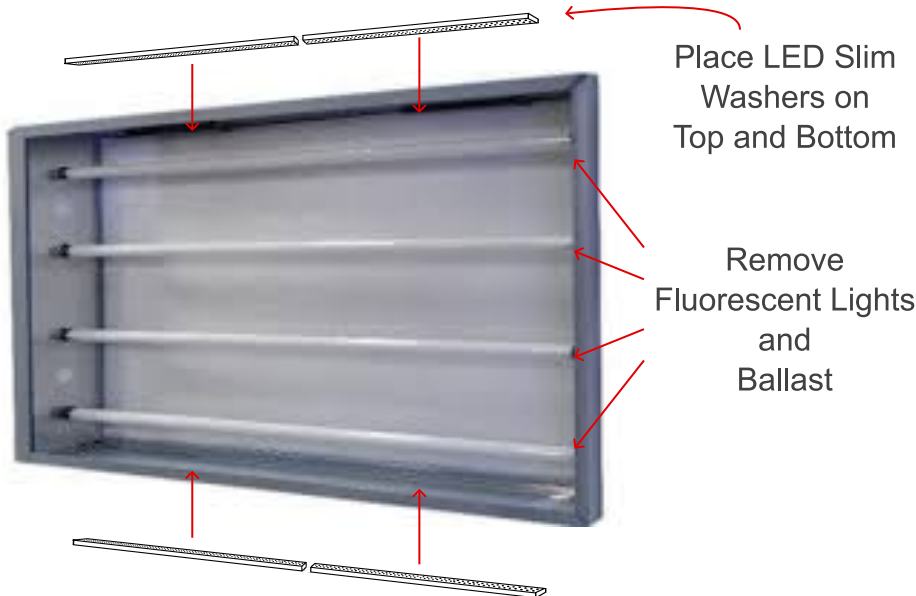

Accessories (Sold Separately):

